


UNDERTILE LEVELLING COMPOUND

ARDEX LQ92

Undertile Levelling Compound

ARDEX LQ 92 is a cement-based underlay for levelling uneven concrete floors prior to tiling. Not recommended for use under vinyl coverings. It is self smoothing and you can tile over it after approximately 4 hours. It is suitable for use with underfloor heating and may be mixed with ARDEX Abalastic liquid when incorporating heating wires.

LOW VOC 

LOCATION

- Internal
- External (not subject to freeze/thaw)

SUBSTRATES

- Concrete

COATINGS

- Polyurethane coatings
- Epoxy coatings
- Ceramic and quarry tiles

SURFACES


- Floors

COVERAGE

- 20kg unit covers approximately 3.8m² at 3mm

BED THICKNESS

- 10mm down to feather edge
- For thicknesses over 10mm and up to 25mm, mix with 2mm – 5mm aggregate
- For ramping mix with up to 10kg of coarse dried sand to achieve a trowelable non-flowing screed

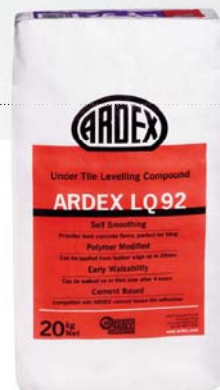

ARDEX LQ92 QUICK FACTS

- Self smoothing - provides level concrete floors, perfect for tiling
- Polymer modified - can be applied from feather edge up to 25mm
- Early walkability - can be walked on or tiled over after 4 hours
- Cement based - compatible with ARDEX cement based tile adhesives



CONTACT US
1300 788 780 | www.ardexaustralia.com



Download the Ardex app
(search for 'ARDEX Australia')



SYSTEM ARDEX
PREMIUM PERFORMANCE